

Terminal heating solution for air source heat pump

lasloxi

lasloxi
Warm Experts

MUCH MORE SAFETY | QUICK HEATING | SMALL SIZE | INTELLIGENT CONTROL | ENERGY SAVING



LASLOKI DCM






THE MAIN STRUCTURE AND FUNCTION



Fine Copper pipe Aluminum fins Heat exchanger



With Ultra-low noise and low power-consumption 24V fans, more safety and more powerful

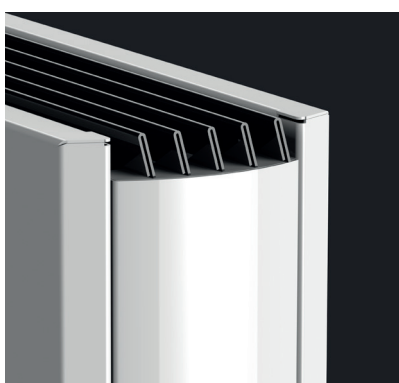

Fine design and decorative finishes with evenly air discharge for a much more comfort room climate.



Manually and automatic fan speed control with just "1" press at the button for quick heating.

Performance table

Water Connection: Side/Bottom type

Central diameter: 240mm

Connection: 1/2" and 3/4"

Operating Pressure: 1.2MPa

Control type: Manually or Auto control

MODEL	L	T	H	Speed	Heating output W)				Air Flow (m3/min)	Power (W)	Voltage (V)
	(mm)	(mm)	(mm)		30°C/25°C/20°C	35°C/30°C/20°C	40°C/35°C/20°C	45°C/40°C/20°C			
LAC-H-600-06/100	630	108	600	High	227	422	601	800	0-3.84	0-4.8	24
				Medium	176	302	443	605			
				Low	99	166	238	295			
				Nature	38	75	119	168			
LAC-H-600-08/100	830	108	600	High	332	618	897	1169	0-5.76	0-7.2	
				Medium	257	441	647	885			
				Low	145	242	348	432			
				Nature	50	101	160	225			
LAC-H-600-10/100	1030	108	600	High	382	711	1012	1346	0-6.72	0-8.4	
				Medium	296	508	745	1019			
				Low	167	279	401	497			
				Nature	63	126	200	281			
LAC-H-600-12/100	1230	108	600	High	431	802	1141	1518	0-7.68	0-9.6	
				Medium	334	573	840	1149			
				Low	188	315	452	560			
				Nature	76	152	240	337			

Above are our standard types. Customized types are also available.